
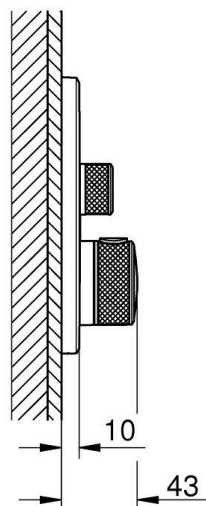


GROHTHERM SMARTCONTROL THERMOSTAT FOR CONCEALED INSTALLATION WITH ONE VALVE – 29118000

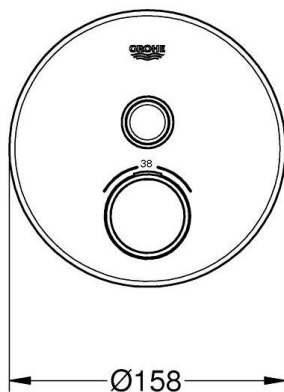

set for final installation for
GROHE Rapido SmartBox 35 600/35 604
metal wall escutcheon with GROHE
FastFixation (covered escutcheon and shaft
sealing, covered fixing), retroactively 6°
adjustable
GROHE Long-Life finish
GROHE SmartControl push for ON-OFF, turn
for volume adjustment from GROHE Water
Saving to Full Flow
exchangeable symbols
GROHE TurboStat compact cartridge with
wax thermoelement
GROHE ProGrip with knurl structure
GROHE SafeStop safety button at
38°C(calibration required)
GROHE SafeStop Plus optional temperature
limiter at 43°C or 46°C included
built-in non return valve and dirt strainers
without roughing-in-set
flow performance: outlet A (to external
shut-off) = 34 l/min outlet B/C = 29 l/min