
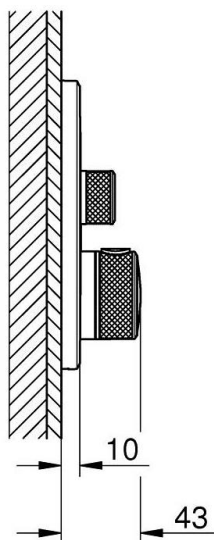


# GROHTHERM SMARTCONTROL

## THERMOSTAT FOR CONCEALED

### INSTALLATION WITH 3 VALVES –

### 29126000

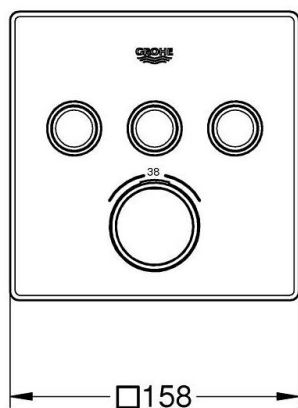

set for final installation for  
 GROHE Rapido SmartBox (35 600/35  
 604)  
 metal wall escutcheon with GROHE  
 FastFixation (covered escutcheon and  
 shaft sealing, covered fixing),  
 retroactively 6° adjustable  
 GROHE Long-Life finish  
 GROHE SmartControl push for ON-OFF,  
 turn for volume adjustment from GROHE  
 Water Saving to Full Flow  
 exchangeable symbols  
 GROHE TurboStat compact cartridge  
 with wax thermoelement  
 GROHE ProGrip with knurl structure  
 GROHE SafeStop at 38°C  
 GROHE SafeStop Plus optional  
 temperature limiter at 43°C or 46°C  
 included  
 built-in non return valves and dirt  
 multiple outlets can be run  
 simultaneously  
 without roughing-in-set  
 flow performance: outlet A = 23 l/min  
 outlet B = 27 l/min outlet C = 23 l/min  
 outlet A + B = 33 l/min outlet A + B + C  
 = 36 l/min